




DOT REFERENCE CARD

GPSTAB ELD | AOB RD

The GPSTab ELD/AOBRD device plugs into the diagnostic port in a vehicle and is integrally synchronized with the engine. The ELD automatically records driving time and connects the GPSTab App on a mobile device via Bluetooth®.

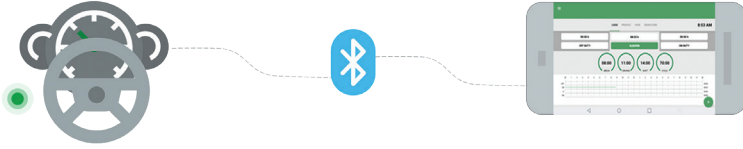

UTECH product GPSTab ELD/AOBRD is approved and officially registered with the FMCSA.

All versions of GPSTab ELD/AOBRD can be found by visiting the government site: www.csa.fmcsa.dot.gov/ELD/List
Enter keywords "GPSTab ELD" or "UTECH"

DEVICE MALFUNCTION CLEARANCE GUIDE



BLUE FIRE	
MALFUNCTION	WHAT TO DO
SOLID RED	Do NOT unplug the device; call customer support
BLINKING BLUE	Turn the engine off and reconnect the plug
BLINKING GREEN	Turn the engine on and restart the tablet




BLUE LINK (WIRELESS LINK)	
MALFUNCTION	WHAT TO DO
NO LIGHT	Turn the engine off and check the cable connection
BLINKING BLUE	Turn the engine off and restart the tablet; call customer support



IOSiX	
MALFUNCTION	WHAT TO DO
NO LIGHT	Turn the engine off and reconnect the plug
TABLET SHOWS "SCANNING"	Call customer support


IF YOUR TABLET SCREEN DOES NOT LOCK WHILE DRIVING




Failing to stop the vehicle and assure proper functioning of the ELD device and application will constitute as a DOT violation.

FOR OFFICER LOG INSPECTIONS


Tap the "Menu" icon and Select "Inspection Module"

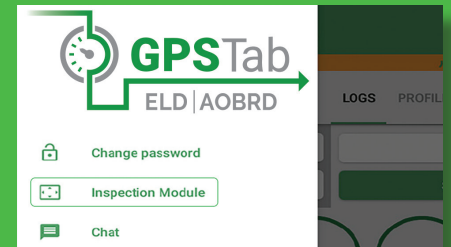


Tap "Begin Inspection" to let an officer view your logs directly from your device

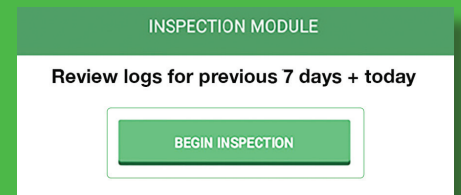

Tap "Send Logs" to email a copy of your logs to an officer

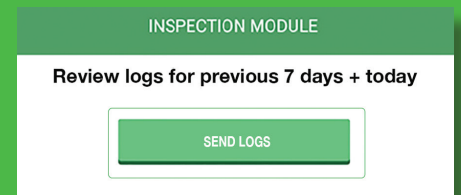

Tap "Send Output File" to submit your ELD output file to the DOT via web services

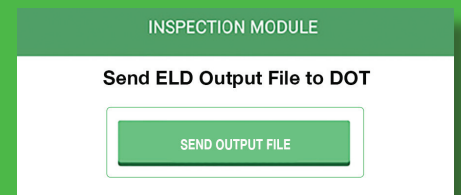

FMCSA REQUIRED—KEEP THIS CAB CARD IN YOUR VEHICLE AT ALL TIMES!

ATTENTION!

For legal and safety purposes, please refrain from calling your office, customer support line, or safety personnel while driving.

GETTING STARTED



STEP 1: Hold the power button, generally found on the side of a mobile device, to turn on your **tablet/smartphone**.



STEP 2: Verify that your device has good **cellular data connection** by checking the cellular signal indicator at the top right corner of the home screen.



STEP 3: Assure that the device is fully charged by checking **the battery level** in the upper right corner of the home screen. We recommend keeping it connected to the charger at all times.



STEP 4: Locate and select the **GPSTab ELD/AOBRD application** icon from your home screen.




STEP 5: Enter **Username and Password** once prompted to the “Sign In” screen. Reset your password if needed.



STEP 6: Select your truck from the vehicle list once logged in. Press **“Confirm”** when prompted to the “Confirm Vehicle” screen. You have now accessed your logs record.

AT THE END OF THE SHIFT



STEP 1: Switch your duty status to **“Sleeper”** or **“Off Duty”** mode in the “Logs” screen.



STEP 2: Log out of the app by tapping the “Menu” icon and selecting **“Log Out”** option.



STEP 3: Always **restart** your device prior to the start of a new shift.



STEP 4: Complete your required **10-hour break** following each shift in order to meet regulatory requirements.



NOTE: The system will not count time **shorter than 10 hours** as a full break (ex: 9 hours, 59 minutes and 59 seconds, constitutes as a violation).

For any questions, please contact our Support Team at **888.228.4460 ext. 2** or send an email to **support@help24.us**